

Asianda[®]

Shenzhen Yaxunda LCD Display Equipment Co., Ltd

Model: PJ-B461P

Version number: V6F

46-inch video wall 3.5mm

Product pictures




Product size

1020*574*136 l * w * t (mm)

Application Pictures



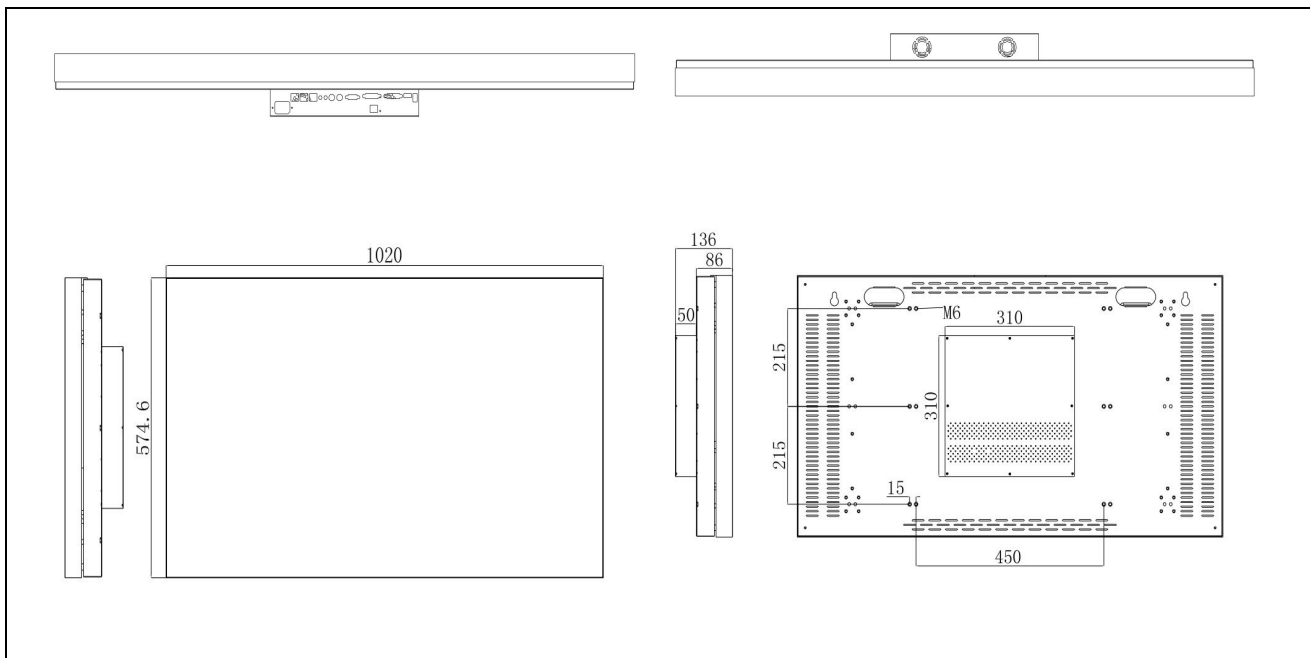

<p>Product characteristics</p>	<p>Dual-channel Dvi high-definition video switching, multiple high-definition video interface, compatibility; The first combination of wireless control technology, multi-user operation design, to meet the control of large screen multi-terminal; Support for USB playback function, support for audio, video, pictures, but also as a machine motherboard upgrade; Led Bright Back Light, 3d digital noise reduction, HD high resolution, progressive scanning, software to improve contrast; Automatically Adjust backlight brightness and refresh frequency, new color restore, automatically adjust color saturation</p>	
<p>Product name</p>	<p>Specification parameter</p>	
<p>Display</p>	<p>LCD: 46 Inch Resolution: 1920*1080 Display Area: 1018*572 contrast: 3500:1 brightness: 500 CDM2 Angle: Horizontal / Vertical: 178</p>	<p>TFT SCREEN RATIO: 16:9 Point Distance: 0.530 * 0.530 Response Time: 6ms</p>
<p>Screen brand</p>	<p>SAMAUNG</p>	
<p>Main board plan</p>	<p>MOTHERBOARD: CS59Y SYSTEM: None</p>	
<p>Interface</p>	<p>The diagram shows a series of icons representing different interfaces: USB, HDMI, DVI IN, TCP/IP, DVI IN, VGA IN, AV IN, AV OUT, AUDIO IN, AUDIO OUT, RS232-IN, RS232-OUT, IR, and AC100-240V.</p>	
<p>parts</p>	<p>Manual, remote control, warranty card, certificate of conformity, power cord</p>	
<p>product mix</p>	<p>Product architecture</p>	<p>Hardware Iron Plate + Paint Process</p>
	<p>Installation mode</p>	<p>Cabinet type, Horizontal Wall, Hoisting type</p>
	<p>Protective glass</p>	<p>None</p>

	weight	28kg
	Product size	1020*574*136 (mm)
	Packing dimensions	1170*720*440 (mm)
Working parameters	SPLICE assembly	Any line X any column
	Input Signal	USB/HDMI/DVI/VGA/AV/AUDIO/RS232/UR
	Control Mode	RS232/TCP/IP/Remote control
	Joint Joint	3.5MM
	work environment	Operating temperature: 0 ° C to + 60 ° c operating humidity: 10% to 90%
	Power Supply	AC110~240V 60HZ
	power	125W