

Asianda®

Shenzhen Yaxunda LCD Display Equipment Co., Ltd

Model no: YXD75P-LS

75-inch long vision free standing display

Product Image




Product size

1744*663*39 h * w * t (mm)

Application Pictures

A Board
+
Free Standing



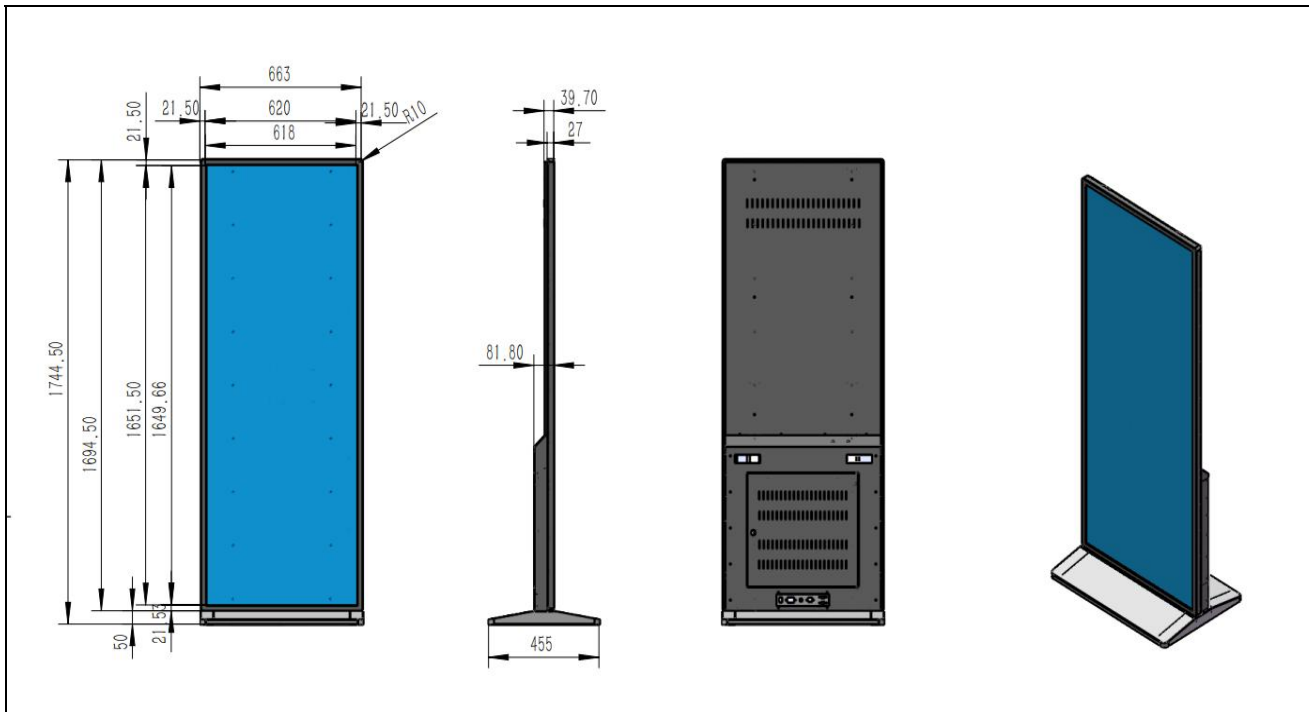

<p>Product characteristics</p>	<p>3d digital filter noise reduction, line-by-line scanning, the screen is true and delicate ; Smart screen protection function, prevent Burns ; Various high definition signal interface, strong compatibility; Intelligent backlight brightness control, improve the visual effect of image, save energy and save electricity ; The intelligent temperature control cooling / heating system ensures the machine to work stably in the best environment.</p>
<p>Playback system</p>	<p>Each playing area can be arranged and layered freely, and can be played on horizontal and vertical screens ; Screen Area Free Segmentation, composable picture, audio, video, web page, clock, date, caption, mixed material editing; Support Program and broadcast table preview, real-time monitoring playback screen, multi-stage timing switch settings, automatic reset ; Different users can set different permissions ; Adopt distributed management, support remote or local control ; Support android phone or tablet terminal to play a list of programs, remote monitoring, timing switch function ; Screen brightness can be adjusted automatically according to the surrounding environment; Supports a variety of general audio / Video, and office documents; Support cable, WiFi, 4G network</p>
<p>Display screen</p>	<p>LCD: 75 Inch TFT SCREEN RATIO: 16:9 Resolution: 38400 * 1440 Display Area: 1649 * 618 Point Distance: 0.24 * 0.74 contrast: 4000:1 brightness: 400 CDM2 Response Time: 6ms Vertical: 178 Angle: Horizontal / backlight: LED backlight</p>
<p>Motherboard scheme</p>	<p>MOTHERBOARD: RK3288 quad-core, 2.0 Ghz Ram: 2 GB BUILT-IN STORAGE: EMMC 8G expandable 64G operating system: Android10.0</p>
<p>Android interface</p>	
<p>Accessories</p>	<p>Manual, remote control, warranty card, certificate of conformity, Power Cord</p>

Product structure	Product architecture	1.5 mm galvanized sheet, sprayed Aksu outdoor powder, outdoor anti-corrosion for more than 7 years
	Dust proof design	The shell structure design waterproof trough and in and out the wind hole waterproof labyrinth, meets the IP55 protection grade
	Anti-theft design	The Base / Hanger is designed with an internal lock to prevent the machine from being moved by removing screws from the outside, which is really safe against theft
	Waterproof design	The air inlet and outlet are designed with special dust-proof filter (medium and high efficiency dust-proof filter) to filter the fine dust in the air and prevent mosquitoes and insects from entering the machine
	Installation mode	Floor type
	Protective Glass	6 mm high transmittance toughened glass or Ar anti-glare toughened glass, light transmittance \geq 97% , high transmittance
	Weight	50kg
	Product size	1744*663*39 (mm)
	Packing size	2070*720*50 (mm)
Operating parameter	Brightness Control	
	Temperature control	
	Working Environment	Working Temperature: -20°C to + 55 °C working humidity: 5% to 90%
	Power supply	AC110~240V 60HZ
	Power	200